

Custom designed to match budget, specification and performance.



Industry Leading Insulation Coretex© insulation is a specially formulated substrate containing various levels of material that ensure almost all of the heat generated within our incinerators stays inside them - increasing performance and efficiency to another level.



Rigid, Long Lasting Construction This model is constructed from British made high quality 3mm mild steel plate. They are fully welded for maximum strength by our time-served coded welders. Meaning you get years of trouble-free operation.



Completely re-designed and built in-house since 2017.

- User friendly
- Robust Components
- Stainless thermocouple
- Minimal training required





Why we use Castable Refractory Linings

- Our latest low cement castable technology has a higher strength and volume stability than the conventional castable.
- It has excellent resistance to thermal cycling
- This castable has fast firing characteristics engineered so is more robust in the initial firing / commissioning stage and in continued service.




Incineration is a waste treatment process that involves the combustion of organic substances contained in waste materials. Incineration and other high-temperature waste treatment systems are described as "thermal treatment". incineration of waste materials converts the waste into ash, flue gas and heat. The ash is mostly formed by the inorganic constituents of the waste and may take the form of solid lumps or powder. In some cases, the heat generated by incineration can be used to generate electric power.


Applications

Our versatile range of basic incinerators are designed to be multi-purpose. This particular model benefits from a top loading design and very simple operation process. Ideal as a stand-alone machine.

- General waste
- Animal by-products
- Medical waste
- Plastics & packaging

- Camp waste
- Domestic waste
- Bandages and gauzes

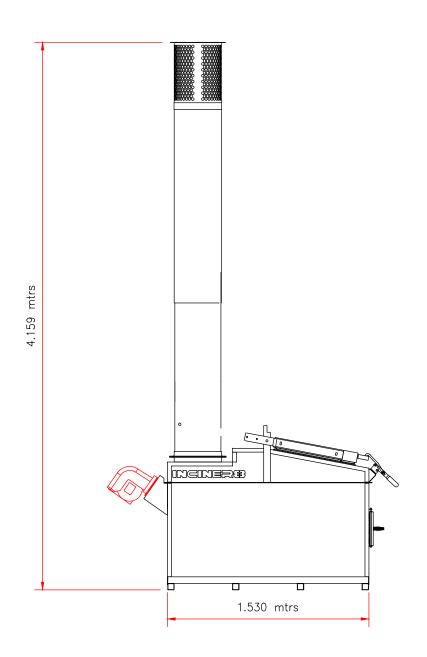

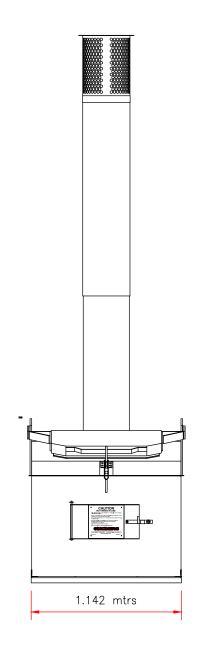

Technical Specification			
Combustion Chamber Volume (m3)	0.75m3	Average Ash Residue (%)	3%
Metal Thickness	3mm	Thermostatic Device	yes
Burn Rate*	40 to 100kg per hour	Shipping Weight (kg)	2200kg
Operational Temperature	850°C	Dimensions (I, w, h)	1.2m x 2.3m x 4.7m


 $^{^{\}star\star}$ Dependent on calorific value of waste and local conditions.


Site Preparation
















Sheltered

Ideal weather protection for equipment and operator. Our shelters are designed for easy and quick installation on a standard reinforced concrete slab.

Certain regions require some sort of shelter from adverse weather conditions or localised problems. Our products are used in diverse locations from the freezing camps of Antarctica to sweltering temperatures of Sierra Leone.



Containerised

Containerisation is the most feasible and viable option in contrast to the construction of on-site facilities and housing structures, eliminating the man power and costs involved.

The units arrive complete with electrical power generators and fuel tank with further customization available to suit all needs, regardless of local resources available. The system is available in 10ft, 20ft, and 40ft containers, depending on capacity and optional requirements.



Trailer-mounted

The trailer is rated to carry up to 2700kg, therefore there is plenty of additional space to carry extra items of equipment including generator sets, fuel and any other equipment. Chassis, framework and panels are galvanized for maximum durability.

These trailers have been built to withstand the rigours of the construction industry. The beam axle system features sealed, specialised wheel bearings and powerful auto-reverse brakes and is unequalled for strength and durability.



All containers supplied are ISO 6346 certified, so they can be used for the shipping and housing of incinerators and any other related equipment.



CE DECLARATION.



MACHINE LISTED BELOW HAS BEEN TESTED BY MANUFACTURER IN FACTORY BEFORE DISPATCH

PRODUCTION DATE: 2018

CONFORMS TO ALL SAFETY NORMS WHEN USED ACCORDINGLY

"CE DECLARATION OF CONFORMITY"

"CE DECLARATION DE CONFORMITE"

"CE DECLARACION OF CONFORMIDAD"

"CE ATTESTATO DI CONFORMITA"

"EG- KONFORM IT A TSERKLARUNG"

INCINER8 LTD, UNIT 2, CANNING ROAD INDUSTRIAL ESTATE, CANNING ROAD, SOUTHPORT PR9 7SN, UNITED KINGDOM

Has declared that the machinery described:

Declares que les machines descrits:

Declaramos que la maquinaria descrita:

Dichiara che la macchina di seguito descrito:

Bestatigt daB die hierunter beschreibt Maschine:

Model (Modele; Modelo; Modello; Modell):

CE INCINERATOR 18-75 C/W Eco Flam Burners

1.BS EN 746-2:1997

(industrial thermo-processing equipment – part 2. Safety requirements for combustion and handling systems)

2.Low Voltage Directive 73/23/EEC

Directive Basse Tension

Directive Baja Tension

Direttiva Sulla Bassa Tensione

Niedrige Sapnnung - Richtlinie Diretivas

3.EMC Compatibility Regulation 89/336/EEC

Directive CEM

Directiva CEM

Direttiva Compatibilita Elettromagnetica

Elektromanetische Vereinbarkeit – Richtlinie Directive EMC

4. Machinery Directive 2006/42/EC (including amendment)

Directive Securite Machines

Directiva Seguridad Maguinas

Direttiva Macchine

Maschinen - Richtlinie Directiva De Maquinario

5. (EC) No 1005/2009 on substances that deplete the ozone layer





www.inciner8.com

INCINER8 Ltd is one of the largest suppliers of incinerators throughout the world. Manufacturing in a factory in Southport and shipping out products through our dedicated sales team & Global Dealership Network.

An experienced team of researchers, designers and engineers have made INCINER8 an innovator in the waste sector, achieving two Queens Awards and many regional business awards.

Our hand engineered machines can process municipal, medical and animal waste streams, providing the best solutions to waste problems around the world.











Speak to the Experts

Our technical sales team are always on hand to answer any questions you may have.

Call +44 1704 884020 or email sales@inciner8.com